



# GPM1110-SERIES

## SIMENSLONS & RECOMMENDED PATTERN

### PACKAGING DIMENSION: [Unit: mm]

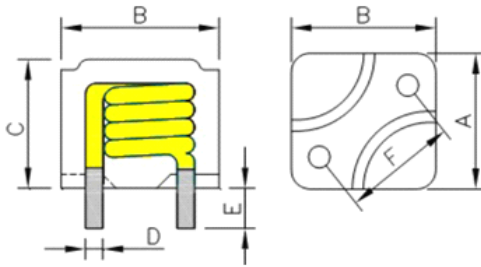

A	11.0 ±0.5
B	11.0 ±0.5
C	by each P/N
D	by each P/N
E	3.5 ±0.5
F	8.5 ±0.5

### SELECTION GUIDE FOR STANDARD COILS.

P/N	L0 Inductance ( $\mu$ H) $\pm$ 20% @0A	DCR ( $m\Omega$ )	Heat Rating Current	Saturation Current
		[ Max ]	Idc (Amp) ( $\Delta T \leq 40^\circ C$ )	Isat (Amp) (80%)
			Typical	Typical
GPM1110-1R2	1.2	2.0	20	30
GPM1110-1R5	1.5	2.2	16	25
GPM1110-2R2	2.2	3.2	16	21
GPM1110-3R3	3.3	4.4	16	20